

# **SURFACE-EDGE**

CONTRACT FLOORING

[WWW.SURFACE-EDGE.COM](http://WWW.SURFACE-EDGE.COM)



## **NEXT WOOD XL**

WATERPROOF HARDWOOD



# SURFACE ■ EDGE

CONTRACT FLOORING

## WHO WE ARE

- An elite contract furnishings group focused on innovative solutions for multi-family, builder, senior living, retail, corporate and hospitality projects.
- Amongst North America's largest flooring buyers with extensive global supply chain expertise.
- Exclusive North American representation for over a dozen high integrity, offshore flooring factories.
- Diverse product line focused on emerging trends and supported by advantages in price, style, quality and supply chain efficiency.

Multi Family

Senior Living

Corporate

Hospitality

Retail



# NEXT WOOD XL

## WATERPROOF HARDWOOD





# SPECIFICATIONS

WWW.SURFACE-EDGE.COM

<b>Collection</b>	Next Wood XL
<b>Size</b>	6.5" x 72" (Random Length)
<b>Construction</b>	Waterproof Wood (SPC core)
<b>Thickness</b>	6.5mm
<b>Surface Treatment</b>	Thermal Treated
<b>Wear Layer</b>	1.2mm Sliced
<b>Embossing</b>	Real Wood
<b>Edge Detail</b>	4 sided bevel
<b>Finish</b>	PowerShield™ with Aluminum Oxide

<b>Emissions</b>	FloorScore
<b>Installation Type</b>	Locking (Floating)
<b>Locking System</b>	Valinge
<b>Attached Pad</b>	Yes
<b>Warranty</b>	Lifetime Limited Residential 10 Year Limited LT Commercial
<b>Sqft per Ctn</b>	20
<b>Sqft per Pallet</b>	66 Ctns = 1,320
<b>Sqft per Container</b>	15 Pallets = 19,800



GreenGuard Gold conforms with the strictest VOC and indoor air quality requirements.



## NO ACCLIMATION

Can be installed as soon as the flooring arrives on site which significantly reduces costs and allows for faster turnarounds.



## WATERPROOF

Real wood flooring that warrants up to 96 hours of water protection from spills.



## DENT RESISTANT

The high density SPC core increases the dent resistance of the real wood veneer to over 2 X harder than solid oak flooring.



## SOUND REDUCTION

Attached IXPE pad reduces sound transmission within a room as well as to the room below.




## INCREASED STABILITY

Waterproof Wood structure reduces the effects of changes in temperature and humidity. Results in less cupping, gapping, and surface cracking.

<b>ASTM E90-2009</b>	STC	61	
<b>ASTM E492-09</b>	IIC	52	
<b>ISO 4918:2009</b>	Caster Chair (25000 Rev.)	Pass	
<b>ASTM D4060</b>	Taber Abrasion	Initial Final	1500 Rev. 2500 Rev.
<b>ASTM D2394</b>	Coefficient Of Friction (COF)	Dry 0.62 Wet 0.60	
<b>ASTM D5582</b>	Formaldehyde	<0.025ppm	
<b>Phthalates</b>	ND (Not Detected)		
<b>ASTM E648</b>	Critical Radiant Flux	Class1	
<b>ASTM E662</b>	Smoke Density-Flaming Smoke Density-Non-Flaming	Passed Passed	
<b>NALFA 3.5</b>	Large ball impact	Class 4	

# WATERPROOF HARDWOOD LAYERS

WWW.SURFACE-EDGE.COM

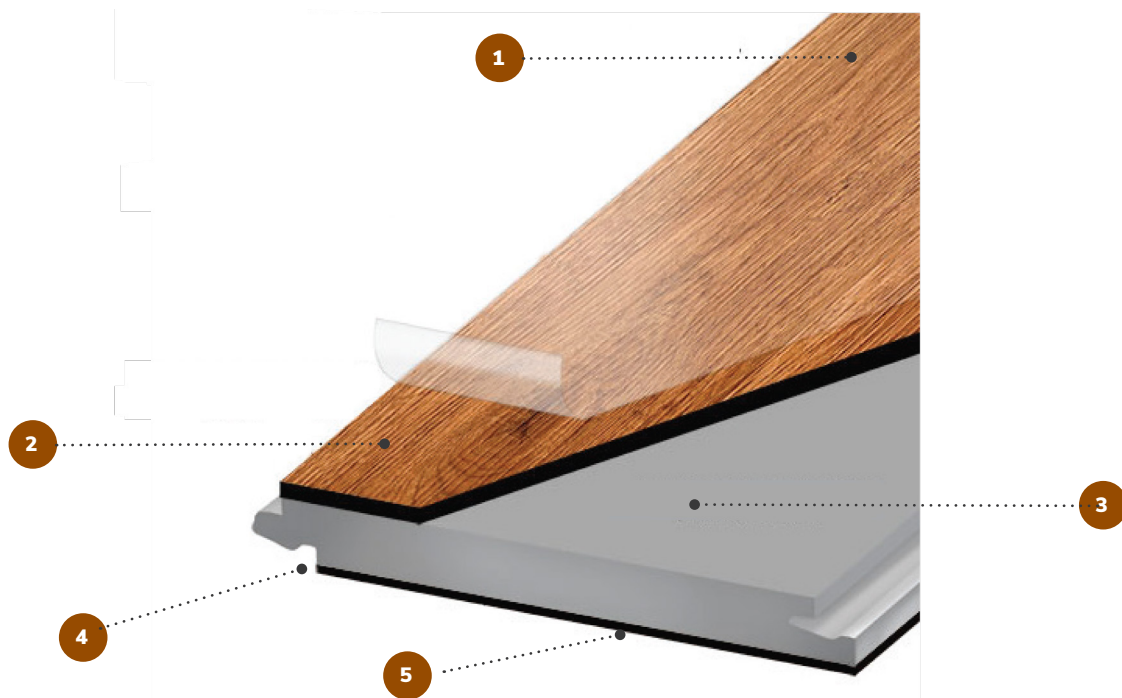

1

## PROTECTIVE COATING

Durable and scratch resistant PowerShield Finish seals and protects wood surfaces from spills and stains

2

## REAL WOOD VENEER

Hardwood veneer eliminates pattern repeats found in vinyl and laminate flooring

3

## SPC CORE

Strong, Rigid, and 100% Waterproof SPC core installs without acclimation

4

## LOCKING SYSTEM

Planks lock together and require no glue or nails for installation

5

## SOUND LAYER

Attached foam under cushion decreases sound reflection and transmission