

# SURFACE-EDGE

CONTRACT FLOORING

[WWW.SURFACE-EDGE.COM](http://WWW.SURFACE-EDGE.COM)



**N E X T   W O O D**

WATERPROOF HARDWOOD



# SURFACE ■ EDGE

CONTRACT FLOORING

# WHO WE ARE

- An elite contract furnishings group focused on innovative solutions for multi-family, builder, senior living, retail, corporate and hospitality projects.
- Amongst North America's largest flooring buyers with extensive global supply chain expertise.
- Exclusive North American representation for over a dozen high integrity, offshore flooring factories.
- Diverse product line focused on emerging trends and supported by advantages in price, style, quality and supply chain efficiency.

Multi Family

Senior Living

Corporate

Hospitality

Retail





# N E X T W O O D

## WATERPROOF HARDWOOD



**Arches**




**Bryce**



**Carlsbad**



**Great Basin**

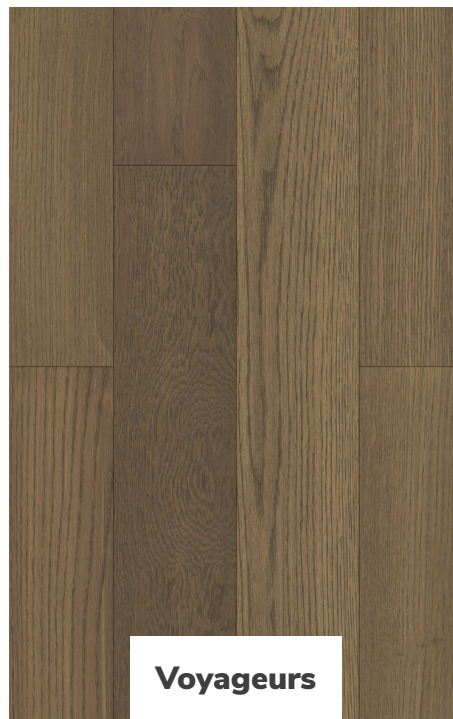

**Voyageurs**

# SPECIFICATIONS

WWW.SURFACE-EDGE.COM

<b>Collection</b>	Next Wood
<b>Size</b>	5" x 48" (Random Length)
<b>Construction</b>	Waterproof Wood (SPC core)
<b>Thickness</b>	7mm
<b>Wear Layer</b>	N/A
<b>Embossing</b>	Real Wood
<b>Edge Detail</b>	4 sided bevel
<b>Finish</b>	PowerShield™ with Aluminum Oxide

<b>Emissions</b>	FloorScore Certified
<b>Installation Type</b>	Locking (Floating) (5" x 48")
<b>Locking System</b>	Unipush
<b>Attached Pad</b>	Yes
<b>Warranty</b>	Lifetime Limited Residential 10 Year Limited Light Commercial
<b>Sqft per Ctn</b>	16.68 (5" x 48")
<b>Sqft per Pallet</b>	934.08 (5" x 48")
<b>Sqft per Container</b>	18681.6 (5" x 48")



GreenGuard Gold conforms with the strictest VOC and indoor air quality requirements.



## NO ACCLIMATION

Can be installed as soon as the flooring arrives on site which significantly reduces costs and allows for faster turnarounds.



## WATERPROOF

Real wood flooring that warrants up to 96 hours of water protection from spills.



## DENT RESISTANT

The high density SPC core increases the dent resistance of the real wood veneer to over 2 X harder than solid oak flooring.



## SOUND REDUCTION

Attached IXPE pad reduces sound transmission within a room as well as to the room below.



## INCREASED STABILITY


Waterproof Wood structure reduces the effects of changes in temperature and humidity. Results in less cupping, gapping, and surface cracking.

# PERFORMANCE TESTING

<b>ASTM E90-2009</b>	STC	61	
<b>ASTM E492-09</b>	IIC	52	
<b>ISO 4918:2009</b>	Caster Chair (25000 Rev.)		Pass
<b>ASTM D4060</b>	Taber Abrasion	Initial Final	1500 Rev. 2500 Rev.
<b>ASTM D2394</b>	Coefficient Of Friction (COF)		Dry 0.62 Wet 0.60
<b>ASTM D5582</b>	Formaldehyde		<0.025ppm
<b>Phthalates</b>	ND (Not Detected)		
<b>ASTM E648</b>	Critical Radiant Flux		Class1
<b>ASTM E662</b>	Smoke Density-Flaming Smoke Density-Non-Flaming		Passed Passed
<b>NALFA 3.5</b>	Large ball impact		Class 4

# WATERPROOF HARDWOOD LAYERS

WWW.SURFACE-EDGE.COM

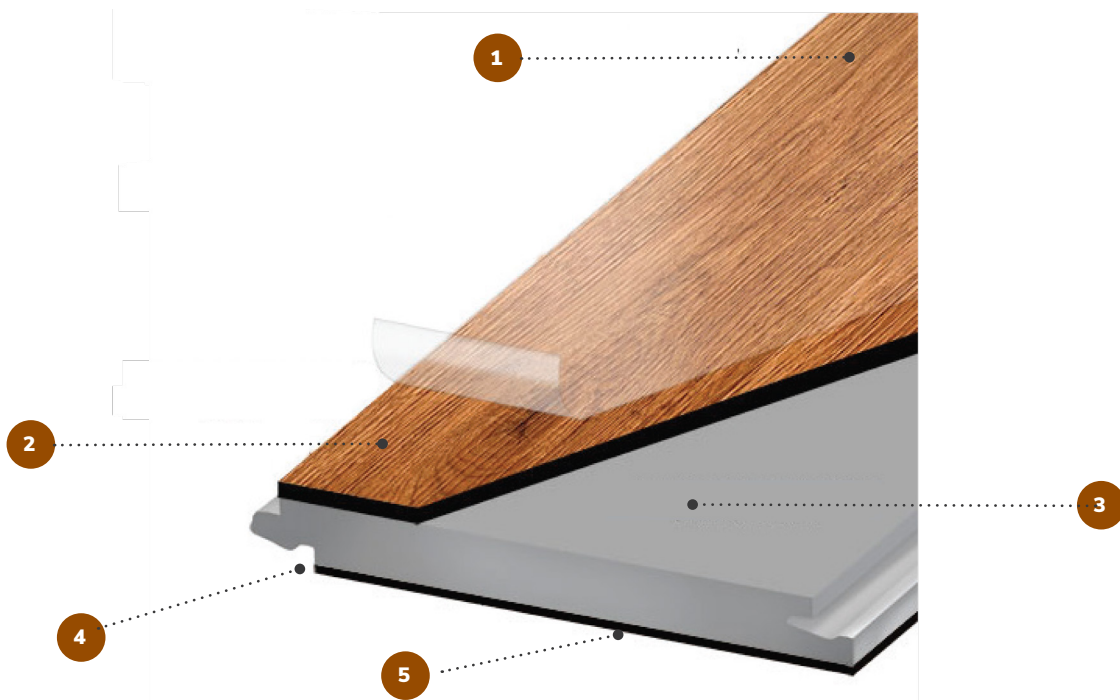

1

## PROTECTIVE COATING

Durable and scratch resistant PowerShield Finish seals and protects wood surfaces from spills and stains

2

## REAL WOOD VENEER

Hardwood veneer eliminates pattern repeats found in vinyl and laminate flooring

3

## SPC CORE

Strong, Rigid, and 100% Waterproof SPC core installs without acclimation

4

## LOCKING SYSTEM

Planks lock together and require no glue or nails for installation

5

## SOUND LAYER

Attached foam under cushion decreases sound reflection and transmission