

SURFACE-EDGE

CONTRACT FLOORING

WWW.SURFACE-EDGE.COM



C A L I B E R 1 2

RIGID DRYBACK

WHO WE ARE

- An experienced contract furnishings group focused on innovative solutions for multi-family, builder, senior living, retail, corporate and hospitality projects.
- Amongst North America's largest flooring buyers with extensive global supply chain expertise.
- Exclusive North American representation for over a dozen high integrity, offshore flooring factories.
- Diverse product line focused on emerging trends and supported by advantages in price, style, quality and supply chain efficiency.

Multi Family

Senior Living

Corporate

Hospitality

Retail



CALIBER 12

RIGID DRYBACK

QUICK • SHIP

Available to ship within 10 business days for orders under 2,500 sqft.



Antero
QUICK • SHIP



San Juan
QUICK • SHIP



Sierra
QUICK • SHIP



Teton
QUICK • SHIP



Wrangell
QUICK • SHIP

SPECIFICATIONS

WWW.SURFACE-EDGE.COM

Collection	Caliber 12
Installation	Glue Down with Wolfgrip WLF1000*
Thickness	2mm
Sqft per Ctn	55.51
Sqft per Container	49,959
Warranty	Limited Residential / 10 year Limited Commercial
Edge Type	Painted Bevel
Embossing	EIR (Embossed in Register)

Construction	SPC
Width	7.40"
Length	60"
Sqft per Pallet	2,775.50
Wear Layer	.3mm / 12 mil
Surface Finish	HardMax w/anti stain
Locking System	N/A



*Wolfgrip adhesive is required on all installation of Caliber.



Embossed in register finish means real-to-touch design for maximum realism.

Ultra-Matte finish for low luster beauty shows less scratching, scuffing, and staining.



Colour cut bevels replicate a real wood floor and eliminates sheet vinyl look.



GreenGuard Gold conforms with the strictest VOC and indoor air quality requirements.



Planks are 100% waterproof making them ideal for installations in moisture prone areas. This product is unaffected by seasonal changes in relative humidity (RH) which can damage other types of flooring over time.



Can be easily maintained without costly maintenance equipment, specialized cleaning products, or time consuming procedures.




Specialized manufacturing processes fuse the layers of the core to create an extremely stable product that can be installed as soon as it arrives on site.



Hardmax finish is significantly more scratch resistant than traditional luxury vinyl.

ASTM E90-2009/ASTM E413-10	STC	62
ASTM E492-09/ASTM E989-12	IIC	53
ASTM E2179-2003/ASTM E989-12	Delta	3
ISO 4918:2009	Caster Chair (25000r)	Pass
Phthalates	ND (Not Detected)	
ASTM F2055-17	Size, tolerance	Length -0.50mm Width 0.01mm
ASTM F386-17	Thickness, product-tolerance	0.09mm
ASTM F410-08	Thickness, wear layer-tolerance	0.00mm
ASTM F2055-17	Squareness-average	0.03mm
ASTM F1914-17	Residual indentation-average	1.5%
ASTM F137-08(2013)	Flexibility	No crack/No break
ASTM F2199-09	Dimensional Stability	Length -0.07% Width 0.03%
ASTM F925-13	Resistance to chemicals	No change
ASTM F1515-15	Resistance to light	Pass
ASTM F1514-03(2013)	Resistance to heat	Pass

RIGID DRYBACK LAYERS

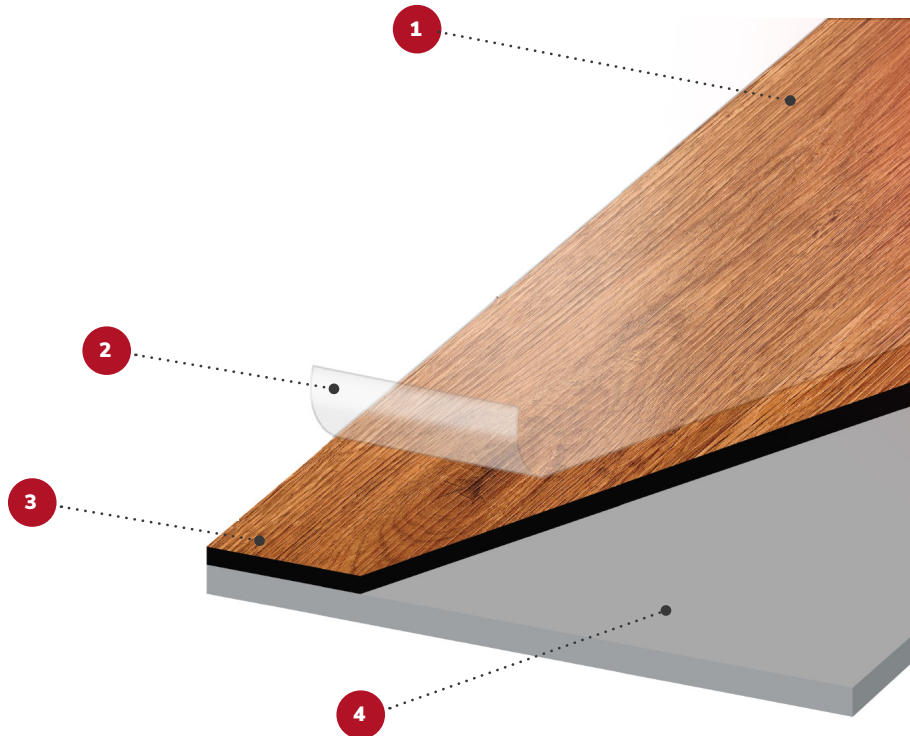

1

PROTECTIVE COATING

UV cured low gloss HardMax finish is highly resistant to scratching and staining

3

DÉCOR LAYER

High resolution print film can be made to look like any surface

2

WEAR LAYER

Clear PVC film that increases durability and extends the life of the floor

4

SPC CORE

Closed cell construction is 30% denser than traditional rigid core products providing greater stability and dent resistance